

**DEVELOPED HERE.  
PROVEN HERE.  
TRUSTED HERE.**

# PRODUCT CATALOG



**EVERYTHING YOU NEED  
TO INSTALL TILE & STONE.**





**AS YOUR CUSTOMERS CHOOSE  
BIGGER TILE, SHOULDN'T  
YOU CHOOSE BETTER MORTARS?**



### **Lightweight mortars. Heavyweight performance.**

Discover the new lightweight mortars that outperform all standard weight mortars. Featuring CustomLite™ Technology, MegaLite™ and ProLite™ offer unmatched bond strengths with incredible handling characteristics. Non-slip performance on walls and non-slump performance on floors—ideal for large format tile and stone installations. And MegaLite even isolates cracks up to 1/8". MegaLite and ProLite—40% lighter than standard weight mortars, with heavy-duty performance.



# THE JAMO FAMILY

FOR OVER 30 YEARS, JAMO HAS HELPED TILE PROFESSIONALS IN THE SOUTHEAST MAKE THEIR PROJECTS LONGER LASTING AND EASIER TO INSTALL. OUR COMPLETE LINE OF SURFACE PREPARATION, SETTING, GROUTS, TILE CARE, AND TOOL PRODUCTS GIVES YOU THE SELECTION AND VERSATILITY YOU NEED TO ENSURE EVERY TILE JOB YOU COMPLETE IS THE BEST IT CAN POSSIBLY BE.

JAMO IS PART OF THE CUSTOM<sup>®</sup> BUILDING PRODUCTS FAMILY OFFERING A BROADER PRODUCT LINE THAN EVER BEFORE. IN ADDITION TO OUR REGIONAL PRODUCTS, WE ARE PROUD TO GIVE YOU THE MOST IMPRESSIVE PRODUCT MIX IN THE INDUSTRY WITH NATIONAL BRANDS LIKE LEVELQUIK<sup>®</sup>, REDGARD<sup>®</sup>, MEGAFLEX<sup>®</sup> AND STONESPECIFIC<sup>™</sup>. TILE PROFESSIONALS LOOK TO JAMO WHEN THEY WANT THE FINEST-QUALITY PRODUCTS FOR THEIR NEXT JOB.

## SUPPORTING YOU

JAMO BUILT ITS NAME ON QUALITY AND CUSTOMER SERVICE, AND THIS COMMITMENT IS GROWING STRONGER OVER THE YEARS. EACH JAMO PRODUCT IS MANUFACTURED TO MEET STRINGENT REQUIREMENTS FOR QUALITY. OUR CUSTOMER REPRESENTATIVES ARE NEVER MORE THAN A PHONE CALL AWAY – 800-826-6852. AND OUR WEBSITE WILL ALWAYS CONNECT YOU TO THE LATEST PRODUCT INFORMATION, INSTALLATION SYSTEM GUIDES, AND ARCHITECTURAL SPECIFICATIONS – [WWW.JAMOINC.COM](http://WWW.JAMOINC.COM)

### WARRANTY PROGRAMS



Jamo supports you with the best warranty programs, including installation system warranties that guarantee your installation will be free from defects for up to a lifetime, provided our products are used as a complete installation system. See back cover for details.

### ARCHITECTURAL SERVICES



Jamo's technical experts provide the most complete source for customized project specifications, warranties, product information, installation advice, problem solving and site inspections. We offer seminars designed for AIA/CES/MCE and HSW continuing education requirements.

### MOLDGARD<sup>™</sup> TECHNOLOGY

All Jamo products are protected by MoldGard Technology, ensuring the tile installation has the highest level of protection against mold and mildew.

### CONTROLLED CURE TECHNOLOGY<sup>™</sup>



Products engineered with Controlled Cure Technology control the rate at which water evaporates during the Portland cement curing process, promoting much faster and consistent hydration.



# SURFACE PREPARATION

## MEMBRANES & UNDERLAYMENTS

### **EASYMAT™ WITH SOUNDGARD® TECHNOLOGY** *formerly SoundGard Lite*

EasyMat is a versatile mat underlayment for setting tile and stone over any acceptable subfloor. EasyMat is fast and easy to install because it's up to 25 times lighter than 1/4" backerboard, it cuts easily with a utility knife, it doesn't require any fasteners, and it comes in a peel & stick version. The mat is specially designed so that the mortar locks in, creating a bonded crack prevention system for subfloor movement up to 1/4".

Use EasyMat with SoundGard Technology to reduce impact sound to meeting building codes and deliver high levels of acoustical control and privacy for interior spaces. EasyMat can reduce impact sound by up to 23 decibels. It's a superior alternative to cork underlayments because it's mold and mildew resistant – it won't rot, shrink or absorb water. Available with a lifetime warranty.  
Available sizes: 3mm, 5mm, 12mm. Peel & Stick: 3mm, 5mm

### **SOUNDOUT® SOUND REDUCTION UNDERLAYMENT SYSTEM**

SoundOut is a two-component lightweight, Portland cement-based, acoustical underlayment specifically developed to reduce impact and transmitted sound through hard flooring systems. Meets or exceeds IIC, INR and STC specifications.  
Available sizes: Powder: 55 LB Bag, Pail: 5 GAL

### **CRACK BUSTER™ CRACK PREVENTION MAT UNDERLAYMENT**

A self-bonding, polypropylene mat designed to reduce crack transmission in ceramic tile or stone floors. Use as an anti-fracture membrane to bridge horizontal cracks up to 1/4" or as a crack isolation membrane. High strength peel & stick backing allows quick and easy application to virtually any substrate.

Available sizes: 18" x 100' roll, 4' x 100' roll

### **PEEL & STICK PRIMER**

Primer specially formulated with a high concentration of solids to ensure the proper bond of peel & stick underlayments, like EasyMat and Crack Buster.

Available size: 1 GAL



<b>UNDERLAYMENTS</b>				
<b>TECHNICAL DATA</b>	<b>EASYMAT 3</b>	<b>EASYMAT 5</b>	<b>EASYMAT 12</b>	<b>CRACK BUSTER</b>
<b>SYSTEMS WARRANTY</b>	Lifetime	Lifetime	Lifetime	Lifetime
Underlayment thickness	3mm	5mm	12mm	1.8mm
Peel & Stick available	Yes	Yes	No	Yes
Roll dimensions	4' x 100'	4' x 75'	4' x 30'	18" x 100'
Roll weight per sq. ft.	<.1 lb.	<.1 lb.	.2 lbs.	<.1 lb.
Roll weight	21.3 lbs.	25.4 lbs.	25 lbs.	—
Roll diameter	13.5"	15"	15.5"	15.5"
TCA Robinson test	Light commercial	Light commercial	Residential	Light commercial
R value	.8	1.5	3.75	.25
Water absorption ASTM C272	.008 g/cm <sup>3</sup>	.008 g/cm <sup>3</sup>	.008 g/cm <sup>3</sup>	.008 g/cm <sup>3</sup>
<b>Bacteria and fungus resistance</b>	no growth	no growth	no growth	no growth
ΔIIC	16	20	23	6 to 8



### WATERPROOF WATERPROOFING MEMBRANE

Ready-to-use, elastomeric, waterproofing and crack prevention membrane for commercial or residential tile and stone installations. Easily applied with a roller, trowel or sprayer. Meets IAPMO specifications for use as a shower pan liner. Use also as a slab-on-grade moisture barrier under resilient or wood flooring.

Available sizes: 1 GAL, 5 GAL

### CUSTOM® 9240 WATERPROOFING & ANTI-FRACTURE MEMBRANE

A thin, load-bearing membrane, comprised of a liquid-applied polymer and a reinforcing fabric, designed to form a flexible, seamless waterproofing membrane. Designed for waterproofing tile and stone installations. Designed for extra heavy-duty service installations. Anti-fracture protection of up to 1/8". Meets IAPMO specifications for use as a shower pan liner.






Available size: 1 KIT consists of 6 GAL Pail, 1- 6" x 75' roll of fabric, 1-36" x 100' roll of fabric

### FRACTUREFREE CRACK PREVENTION MEMBRANE

Ready-to-use, elastomeric, crack prevention membrane developed for protecting tile floors from cracks due to minor surface movement. Provides crack prevention up to 1/8" over shrinkage and other non-structural cracks.

Available size: 35 LB Bag

MEMBRANES		
PHYSICAL PROPERTIES	WATERPROOF	CUSTOM 9240
APPLICABLE ANSI STANDARDS	ANSI A118.10	ANSI A118.10
SYSTEMS WARRANTY	Lifetime	Lifetime
Fungus and Micro-Organism Resistance (4.2)	Passes	Passes
Seam Strength (4.2)	16 lbs/in 2 inch width	97 lbs/in. width
Breaking Strength (4.3)	484 psi	2550 psi
Dimensional Stability (4.4)	0.05%	No change
Waterproofness (4.5)	Passes	Passes
Shear Strength:		
12-week Dry Cure (5.6)	267 psi	305 psi
100-day Water Immersion (5.7)	89 psi	89 psi
Pot Life @70° F (21° C)	Indefinite	Indefinite
Initial Set, ASTM C191 @ 70° F (21° C)	1-1/2 - 2 hrs	1-1/2 - 2 hrs
Cure Time	1-1/2 - 2 hrs or up to 12 hrs	1-1/2 - 2 hrs or up to 12 hrs
Approx. Coverage Range	35-40 sq ft/gal @ 93 mls wet thickness	Kit covers approx. 300 sq. ft.



## SELF-LEVELING UNDERLAYMENTS

### LEVELLITE™ SELF-LEVELING UNDERLAYMENT



Formulated with CustomLite™ Technology, LevelLite is 40% lighter than other self-leveling underlayments, making it easier to carry and pour. Seeks its own level in minutes. Excellent for installations where weight is a concern. Cures fast and develops high early and final strength for quick installations. Made with 100% recycled materials – contributes to LEED certification.

Available size: 30 LB Bag

### LEVELQUIK® RS RAPID SETTING SELF-LEVELING UNDERLAYMENT



Engineered to easily level floors prior to the installation of a wide variety of floor coverings, in commercial or residential applications. Rapid Setting formula cures fast while developing high early strength. Apply from featheredge to 1" thick in just one pour.

Available size: 50 LB Bag

### LEVELQUIK® DP DEEP POUR SELF-LEVELING UNDERLAYMENT



Engineered to easily level floors prior to the installation of a wide variety of floor coverings, in commercial or residential applications. Deep Pour up to 2" thick in one pour. Cures fast developing high early strength for quick installations.

Available size: 50 LB Bag

### LEVELQUIK® ES EXTENDED SETTING SELF-LEVELING UNDERLAYMENT

Engineered to easily level floors prior to the installation of a wide variety of floor coverings, in commercial or residential applications. Extended setting formula for extended work time as required. Apply from featheredge to 1" thick.

Available size: 50 LB Bag

### LEVELQUIK® LATEX PRIMER

Latex primer/sealer that prepares surfaces for the application of LevelQuik or LevelLite Self-Leveling Underlayments. It seals porous surfaces and improves the bond of underlayments.


Available size: 50 LB Bag

## SELF-LEVELING UNDERLAYMENTS

PHYSICAL PROPERTIES	LEVELLITE	LEVELQUIK RS	LEVELQUIK DP	LEVELQUIK ES
APPLICABLE ANSI STANDARDS	No national standard	No national standard	No national standard	No national standard
SYSTEMS WARRANTY	Lifetime	Lifetime	Lifetime	Lifetime
Compressive Strength, ASTM C109				
1 day cure	2600 psi	2400 psi	3400 psi	2400 psi
28 day cure	4600 psi	4400 psi	6000 psi	4000 psi
Flexural Strength, ASTM C109 @ 28 days	1200 psi	1100 psi	1200 psi	900 psi
Pot Life @ 70° F (21° C)	30 min	30 min	30 min	45 min
Flow Time @ 70° F (21° C)	10 min	10 min	15 min	30 min
Initial Set, ASTM C109 @ 70° F (21° C)	75 min	90 min	80 min	2 hrs
Final Set, ASTM C109 @ 70° F (21° C)	2 hrs	3.5 hrs	2 hrs	3.5 hrs
Workable Hardness	2-4 hrs	2-4 hrs	2-4 hrs	Overnight
Cure time before floor covering installation	4 hrs ceramic tile and stone floors 14 hrs impervious floor coverings	4 hrs ceramic tile 14 hrs impervious floor coverings	4 hrs ceramic tile 14 hrs impervious floor coverings	18-24 hrs
Application Thickness	Featheredge to 2"	Featheredge to 1"	Up to 2"	Featheredge to 1"
Approximate Coverage Range @ 1/8"	55 sq ft/ 30 lb bag	50 sq ft/ 50 lb bag	50 sq ft/ 50 lb bag	50 sq ft/ 50 lb bag
Robinson-Type Floor Tester ASTM C627	Extra heavy rating	Extra heavy rating	Extra heavy rating	Extra heavy rating

## PATCHING COMPOUND

### **SPEEDFINISH™ PATCHING & FINISHING COMPOUND**



 A cement-based patching and skim coating compound that provides a smooth finish to a variety of substrates prior to the installation of floor coverings. Install most floor coverings in as little as 15 minutes. Available size: 10 LB Box

### **WALL MUD PRE-MIXED LIGHTWEIGHT BROWNCOAT**

Pre-mixed, lightweight, browncoat designed as a plaster substrate for vertical interior tile applications. It's lighter in weight than conventional mud, imposing less dead load on structural members. Available size: 45 LB Bag

### **FLOOR MUD PRE-BLENDED UNDERLAYMENT**

A factory blend of Portland cement, sand and chemical modifiers for floating shower pans and other floor tile installations. Available size: 50 LB Bag



## BACKERBOARD

### **WONDERBOARD® CEMENT BACKERBOARD**

The original underlayment for tile and stone installations. Ideal for any exterior or interior walls, floors, counters and wet areas. Tapeless installation saves time. Available in 1/4" and 1/2" thicknesses.

<b>PATCHING COMPOUND</b>	
<b>PHYSICAL PROPERTIES</b>	<b>SPEEDFINISH</b>
<b>APPLICABLE ANSI STANDARDS</b>	<b>No national standard</b>
Compressive Strength, ASTM C109 @ 28 days	3200 psi
Flexural Strength, ASTM C109 @ 28 days	500 psi
Pot Life @ 70° F (21° C)	30 min
Initial Set, ASTM C109 @ 70° F (21° C)	15 min
Final Set, ASTM C109 @ 70° F (21° C)	30 min
Cure time before floor covering installation	15-20 min Up to 16 hrs for moisture sensitive flooring or adhesives
Application Thickness	Featheredge to 1/2"
Approximate Coverage Range @ 1/8"	30 sq ft/ 10 lb box

<b>BACKERBOARD</b>		
<b>PHYSICAL PROPERTIES</b>	<b>1/2" WONDERBOARD (13MM)</b>	<b>1/4" WONDERBOARD (6MM)</b>
Compression Indentation	6500 psi	6750 psi
Fastener Holding	220 lbs	150 lbs
Flame Spread/Smoke Development Indices	0/0	0/0
Flexural Strength ASTM C947 ASTM C1185	1100 psi N/A	1800 psi N/A
Weight/Sq Ft (M <sup>2</sup> )	3 lbs	2 lbs (.9kg)
Linear Variation with Moisture Change	<.07%	<.07%
Tensile Bond to Surface	>50 psi	>50 psi
Bacteria and Fungus Resistance	No growth	No growth
Systems Warranty	Lifetime	Lifetime



# SETTING PRODUCTS

## HIGH PERFORMANCE POLYMER-MODIFIED MORTARS

### MEGALITE™ CRACK PREVENTION MORTAR



MegaLite offers exceptional bond strength and the flexibility to withstand horizontal substrate movement up to 1/8". Formulated with CustomLite™ Technology, MegaLite is 40% lighter than other mortars, providing non-sag/non-slip on walls and excellent handling characteristics. Made with 100% recycled materials – contributes to LEED certification. Available size: 30 LB Bag


### MEGAFLEX® CRACK PREVENTION MORTAR

The ultimate in flexibility and bond strength, MegaFlex provides unsurpassed bonds with its unique formula. Isolates cracks up to 1/8". Extended open and adjustment times provide excellent handling characteristics. Offers up to 20% more coverage than other thin-sets. Available size: 50 LB Bag

### PROLITE™ TILE & STONE MORTAR



ProLite offers high flexibility and bond strength for a wide variety of floor and wall tile installations. Excellent for setting large format tile or stone, ProLite will not sag or slip on walls and offers non-slump performance for floor installations. Formulated with CustomLite™ Technology, ProLite is 40% lighter than traditional mortars, providing excellent handling characteristics. A 30 lb. Bag covers the same area as a 50 lb. bag of traditional mortar. Formulated with recycled materials – contributes to LEED certification. Available size: 30 LB Bag



### MULTI-PURPOSE FLEX THIN-SET MORTAR

Multi-Purpose Flex has superior bond strength for setting porcelain, glass and other non-porous tile to concrete surfaces, backerboards and self-leveling underlayments. Sets large porcelain tile over 12" x 12". Also great for radiant heating system installations. Available size: 50 LB Bag

### MULTI-BOND FLEX THIN-SET MORTAR

Multi-Bond Flex offers high flexibility and bond strength for a wide variety of floor and wall tile installations. It offers exceptional adhesion to plywood subfloors and is an excellent choice for porcelain and glass tile installations. Available size: 50 LB Bag

### MULTI-BOND THIN-SET MORTAR

Multi-Bond is good bond strength, all-purpose bonding mortar for floor and wall tile projects. Fast setting, even in cool weather climates. Polymer-modified to ensure enhanced flexibility; smooth, easy troweling with consistent, long-lasting results. Available size: 50 LB Bag

HIGH PERFORMANCE MORTARS						
PHYSICAL PROPERTIES	MEGALITE	MEGAFLEX	PROLITE	MULTI-PURPOSE FLEX	MULTI-BOND FLEX	MULTI-BOND
APPLICABLE ANSI STANDARDS	A118.4/118.11	A118.4/118.11	A118.4/118.11	A118.4/118.11	A118.4/118.11	A118.4/118.11
SYSTEMS WARRANTY	Lifetime	Lifetime	10 Year	15 Year	10 Year	5 Year
<b>Shear Bond Strength @ 28 days:</b>						
Bisque Tile	832 psi	800 psi	600 psi	550 psi	575 psi	500 psi
Porcelain Tile	701 psi	680 psi	450 psi	450 psi	350 psi	250 psi
Quarry Tile to Plywood	365 psi	350 psi	250 psi	190 psi	250 psi	190 psi
<b>Compressive Strength @ 28 days</b>						
Pot Life @ 72° F (22° C)	4 hrs	4 hrs	4 hrs	2 hrs	4 hrs	4 hrs
Open Time @ 72° F (22° C)	100-120 min	100-200 min	55-60 min	30 min	55-60 min	50-55 min
Initial Set @ 72° F (22° C)	6 hrs	6 hrs	6 hrs	6 hrs	6 hrs	6 hrs
Final Set @ 72° F (22° C)	9 hrs	9 hrs	9 hrs	9 hrs	9 hrs	9 hrs
Approx. Coverage 1/4" x 1/4" x 1/4" square-notch trowel	100-110 sq ft/ 30 lb bag	100-110 sq ft/ 50 lb bag	90-100 sq ft/ 30 lb bag	90-100 sq ft/ 50 lb bag	90-100 sq ft/ 50 lb bag	80-100 sq ft/ 50 lb bag
Color(s)	White & Gray	White & Gray	White & Gray	White & Gray	White & Gray	White & Gray

\*Using a 1/2" x 1/2" x 1/2" square-notch trowel



## SPECIALTY MORTARS

### MEDIUM BED MORTAR

Medium Bed Mortar is an economical formula for installing large tile over 12" x 12", natural stone, or any installation requiring a medium bed mortar. Apply up to 3/4" thick on horizontal applications. Its non-slumping formula eliminates lippage saving time and labor by minimizing the need for leveling tile.

Available size: 50 LB Bag

### MARBLE MASTER™

Marble Master is a medium bed, dry set mortar designed for installing marble, granite and tiles 12" x 12" or larger. Non-slumping, eliminates lippage, non-sag/non-slip on vertical installations.

Available size: 50 LB Bag

### GLASS BLOCK MORTAR MIX

A pre-mixed blend for quick and easy installation of glass blocks. Flexible, high-strength formula eliminates the need for guesswork and measuring of on-site mixes. Resists cracking and powdering.

Available size: 50 LB Bag

### FAST-SET 5000

Fast-Set 5000 is a sanded thin-set specifically designed for time-critical installations. Grout in just 2 hours, traffic in 6. Polymer-modified for high bond strength. Excellent for commercial use by experienced installers or for cold temperature installations.

Available size: 25 LB Bag

### STAR-EPOXY MORTAR

Star-Epoxy Mortar is a 100% solids three-component system that produces exceptional bond and compressive strengths, with improved chemical and stain resistance.

Available sizes: SMALL, COMMERCIAL

## BASIC MORTARS

### PREMIUM SANDED THIN-SET

Premium is a quality sanded thin-set with extra long open time which is smooth and easier to apply. Specially formulated for warm weather applications.

Available size: 50 LB Bag

### GTS® SANDED THIN-SET

GTS is an economical sanded thin-set for floor tile.

Available size: 50 LB Bag

### JAMOBLEND® FLOOR & WALL SANDED THIN-SET

JamoBlend is an economical, sanded thin-set for most tile installations, with good working time to apply and adjust tiles.

Available size: 50 LB Bag

### UNSANDED THIN-SET

UnsanDED Thin-Set is the dry set mortar of choice for sheet mounted mosaics and 4-1/4" x 4-1/4" wall tile.

Available size: 25 LB Bag



SPECIALTY MORTARS				BASIC MORTARS			
PHYSICAL PROPERTIES	MEDIUM BED	MARBLE MASTER	FASTSET 5000	STAR EPOXY	PREMIUM SANDED	GTS	JAMO BLEND
APPLICABLE ANSI STANDARDS	A118.4./118.11	A118.4./118.11	A118.4./118.11	A118.3	A118.4./A118.11	A118.1	A118.1
SYSTEMS WARRANTY	5 Year	10 Year	10 Year	15 Year	10 Year	5 Year	1 Year
<b>Shear Bond Strength @ 28 days:</b>							
Bisque Tile	350 psi	450 psi	475 psi	>1000 psi	410 psi	350 psi	250 psi
Porcelain Tile	250 psi	300 psi	340 psi	>1000 psi	370 psi	250 psi	190 psi
Quarry Tile to Plywood	N/A	160 psi	170 psi	N/A	185 psi	N/A	N/A
<b>Compressive Strength @ 28 days</b>							
Pot Life @ 72° F (22° C)	2 hrs	4 hrs	30 min	1 hr	4 hrs	N/A	N/A
Open Time @ 72° F (22° C)	60 min	60 min	25 min	15 min	35-70 min	120min	55 min
Initial Set @ 72° F (22° C)	6 hrs	6 hrs	1 hr	4 hrs	6 hrs	N/A	N/A
Final Set @ 72° F (22° C)	9 hrs	9 hrs	3 hrs	8 hrs	9 hrs	N/A	N/A
Approx. Coverage 1/4" x 1/4" x 1/4" square-notch trowel	45-50 sq ft/ 50 lb bag*	45-50 sq ft/ 50 lb bag*	45-55 sq ft/ 25 lb bag	25-35 sq ft/ unit	100-110 sq ft 50 lb bag	90-100 sq ft/ 50 lb bag	95-95 sq ft 50 lb bag
Color(s)	White & Grey	White	Grey	Off-White	White & Grey	White & Grey	White & Grey

\*Using a 1/2" x 1/2" x 1/2" square-notch trowel

## ADDITIVES

### STAR SET® 1000

Star Set 1000 is an additive that increases the performance and bond strength of Jamo Premium Sanded and GTS® Thin-Set Mortars.

Available sizes: 1 GAL, 5 GAL, 55 GAL

### STAR BOND

Star Bond is a ready-to-use bonding agent for concrete, stone, brick or similar substrates.

Available sizes: 1 GAL, 5 GAL

### BOND ACCELERATOR 4000

Bond Accelerator 4000 is a latex admixture that accelerates the set of dry set mortars while providing a higher bond strength. Available size: 1 GAL

### ● CUSTOMFLEX® ADDITIVE ULTRA-STRENGTH THIN-SET ADDITIVE

Advanced acrylic latex additive that substantially increases bond strength and flexibility when combined with Jamo Premium Sanded Thin-Set Mortar. Excellent for use with difficult-to-bond applications.

Available sizes: 2 GAL, 5 GAL



## ADHESIVES

### MASTIK 500

Mastik 500 is an excellent, acrylic mastic with added polymers designed for use in areas requiring prolonged water resistance.

Available sizes: 1 QT, 1 GAL, 3 1/2 GAL

### MASTIK 440

Mastik 440 is a contractor grade acrylic mastic for use on floor and wall installations.

Available size: 3 1/2 GAL

### ● OMNIGRIP® MAXIMUM STRENGTH ADHESIVE



OmniGrip's unique formula sets a radical new standard, offering many benefits not found in traditional tile adhesives. Formulated with more solids and less water, OmniGrip shrinks up to 33% less than traditional adhesives ensuring maximum coverage and superior bonds. This high-polymer formula remains flexible allowing a wide variety of installations. OmniGrip also weighs 25% less than traditional adhesives, so application is virtually effortless – and it's easier to carry around the job site.

Available sizes: 1 GAL, 3 1/2 GAL

### ● T1-60™ WALL & FLOOR TILE ADHESIVE

Commercial grade T1-60™ Wall & Floor Tile Adhesive offers economical and durable bonds for most wall, floor and countertop installations of ceramic tile. Type I requirements for organic adhesives.

Available size: 3 1/2 GAL

### CORK ADHESIVE

Cork Adhesive is a solvent free, non-flammable, and almost odorless adhesive for the installation of cork underlays.

Available size: 4 GAL

## CERAMIC TILE ADHESIVES

PHYSICAL PROPERTIES	OMNIGRIP	MASTIK 500	MASTIK 440	T1-60
APPLICABLE ANSI STANDARDS	ANSI A136.1 Type I	ANSI A136.1 Type I	ANSI A136.1 Type I	ANSI A136.1 Type I
SYSTEMS WARRANTY	15 Year	1 Year	1 Year	1 Year
Adjustment Time	60+ min	50 min	45 min	50 min
Open Time	60+ min	60 min	60 min	60 min
Shear Bond Strength:				
Type 1 Water Immersion	145 psi	50 psi	50 psi	50 psi
Dry Shear @ 28 days	760 psi	>250 psi	>200 psi	>250psi
Freeze/Thaw	Stable	Stable	No	Stable
Stain Test	Passes	Non-Staining	Non-Staining	Non-Staining
Impact Test	Passes	Passes	Passes	Passes
Heat Resistance	Passes	Resistant	Resistant	Resistant
3.5 gal. Pail Weight	31 lbs	48 lbs	45 lbs	48 lbs
Approx. Coverage Range	40-60 sq ft/gal	60-75 sq ft/gal	40-60 sq ft/gal	40-60 sq ft/gal

# GROUTS

## MASTER COLOR™ GROUT

Master Color Grout is a polymer-modified, sanded grout for joint widths from 1/8" to 5/8". Provides exceptional color uniformity, high wear characteristics and stain resistance without the addition of latex admixtures. Excellent flexural and bond strength, color control, high compressive strength and minimal efflorescence. Resists bacteria, fungus, alkalis and is freeze/thaw stable when cured. Available in 37 colors. Available size: 25 LB Bag

## DRY GROUT


Dry Grout is an unsanded grout for joint widths up to 1/8". Excellent for residential and commercial installations. Available sizes: 10 LB Pail, 25 LB Bag

## STAR-EPOXY GROUT

Jamo's Star-Epoxy Grout is a two-part unit, consisting of a resin and a hardener that is added to Jamo's Master Color to produce improved chemical and stain resistance. Available in 37 standard colors. Available sizes: SMALL, COMMERCIAL

## GROUT STAIN

Grout Stain is a long lasting and highly wear-resistant grout stain, used to change or restore tile grout joints. Available in 37 colors. Available size: 1 QT



## CERAMIC TILE CAULK, SANDED

A siliconized, acrylic latex caulk that matches the most popular Master Color Grout colors. Available size: 10.5 OZ Cartridge

## CERAMIC TILE CAULK, NON-SANDED

A siliconized, acrylic latex caulk that matches the most popular Master Color Grout colors. Available size: 10.3 OZ Cartridge

GROUTS			
PHYSICAL PROPERTIES	MASTER COLOR	DRY GROUT	STAR EPOXY
APPLICABLE ANSI STANDARDS	A118.6	A118.6	A118.3
SYSTEMS WARRANTY	Lifetime	—	Lifetime
Linear shrinkage - 7 day cure			
Water absorption after immersion	4%	12%	n/a
Water absorption after drying	6-8%	6%	n/a
Compressive strength 7 day cure	>2900 psi	>2400 psi	>7000 psi
Compressive strength 28 day cure	>4000 psi	>3500 psi	n/a
Tensile strength			
7 day	345 psi	—	—
28 day cure	423 psi	—	n/a
Flexural Strength 7 days	990 psi	—	n/a
Pot Life	2 hrs	6 hrs	1 hr
Initial Set	2 hrs	2 hrs	4 hrs
Final Set	8 hrs	8 hrs	18 - 24 hrs
Colors	37	33	37



# CARE

## SEALERS

**NEW!**

**STONE SPECIFIC™ POLISHED GRANITE SEALER**

**STONE SPECIFIC™ POLISHED MARBLE, TRAVERTINE + LIMESTONE SEALER**

**STONE SPECIFIC™ TUMBLED/HONED MARBLE, TRAVERTINE, LIMESTONE + SLATE SEALER**

Specifically formulated trio of sealers for optimum stain protection on polished granite, polished marble, travertine and limestone or tumbled/honed marble, travertine limestone and slate. Sealer penetrates the surface of stone, providing protection from oil and water-based stains that can ruin natural stone.

Available sizes: 1 QT, 1/2 GAL

**STONE SPECIFIC™ POLISHED GRANITE COUNTER KIT**

Ultimate 2-part system includes everything to protect and shine polished granite countertops. Part 1: Penetrating sealer protects against oil and water based stains. Part 2: Finishing silicone wax provides topical protection to bead and shed water-based stains. Removes light abrasions and etching, while enhancing shine.

Available size: 1 KIT

**TILELAB® SURFACEGARD® PENETRATING SEALER**

Maximum-strength sealer with guaranteed satisfaction, proves SurfaceGard is the industry's leading penetrating sealer for all stone, grout and tile.

Available sizes: 1 PINT, 1 QT, 1/2 GAL, 1 GAL, 5 GAL, 55 GAL

**TILELAB® GROUT & TILE SEALER**

Professional-grade penetrating sealer protects grout, unglazed tile or masonry against oil-based or water-based stains. Use indoors or out.

Available sizes: 1 QT, 1 GAL, 5 GAL, 55 GAL



**STONE SPECIFIC™ STONEGLOSS POLISH**

Restores luster and enhances color while hiding etching and abrasions in a spray-and buff polish. Provides a water-resistant finish for polished stone.

Available size: 1 PINT

**TILELAB® GLOSS SEALER & FINISH**

Top coat finish protects Saltillo, terra cotta, slate or flagstone. Resists scuffs and stains. High gloss finish for interiors only.

Available sizes: 1 QT, 1 GAL

**TILELAB® MATTE SEALER & FINISH**

Top coat finish protects Saltillo, terra cotta, slate or flagstone. Resists scuffs and stains. Matte Sealer & Finish can be used indoors or out.

Available sizes: 1 QT, 1 GAL

**CBP GLOSS & SEAL**

Economical high gloss, surface sealer and protective finish for clay pavers. Enhances color, in interior areas, while providing scuff, mar and scratch resistance. Water-based finish with low odor.

Available size: 1 GAL

**CBP PRE-GROUTING SEALER**

Economical, pre-grout finishing sealer protects unglazed tile from grout haze and grout pigment stains. Applies easily indoors or out. Low odor, water-based formula. Can be used as a natural-look finishing sealer.

Available size: 1 GAL

**CBP GROUT, CONCRETE & MASONRY SEALER**

Economical, general-use sealer that resists efflorescence on grout and concrete block walls. Low odor, water-based formula can be used indoors or out.

Available size: 1 GAL

**STONE SPECIFIC™ STONE ENHANCER + SEALER**


Color enhancer and penetrating sealer for all types of porous natural stone and grout. Rejuvenates the color and appearance of worn, faded stone, tumbled marble and other rustic-look stones. Can also be used to darken the color of grout. Provides long-lasting protection against oil, grease and stains. Its water-based, low odor formula can be used indoors or outdoors.

Available sizes: 1 QT, 1/2 GAL




**CBP ENHANCER & SEALER**

Finishing sealer rejuvenates color and improves appearance of worn or weathered stone. Formulated to deepen the color of stone and grout, leaving a matte finish. Also can be used as a pre-grouting sealer.

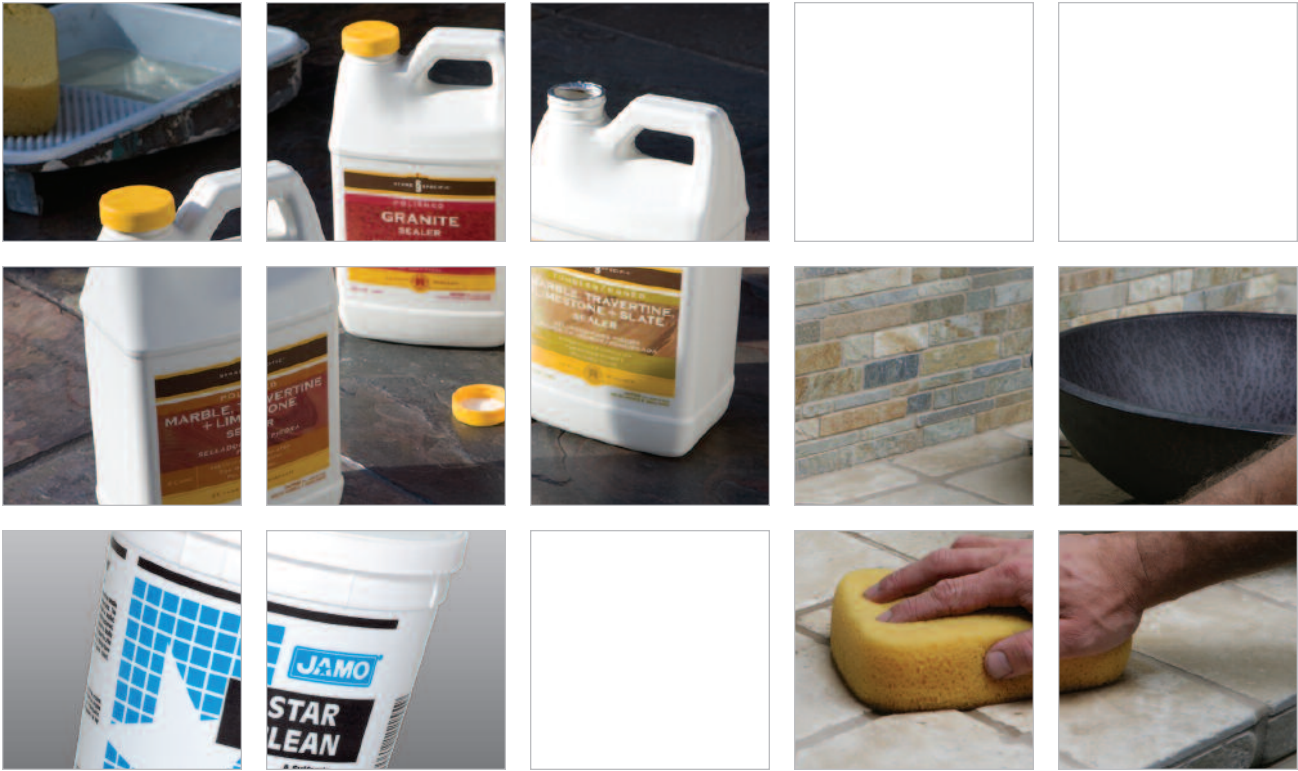

Available size: 1 GAL



## CLEANERS

- 
**STONE SPECIFIC™ POLISHED GRANITE CLEANER + RESEALER** NEW!
- 
**STONE SPECIFIC™ POLISHED MARBLE, TRAVERTINE, LIMESTONE CLEANER + RESEALER**
- 
**STONE SPECIFIC™ TUMBLED/HONED MARBLE, TRAVERTINE, LIMESTONE + SLATE CLEANER + RESEALER**

Ready-to-use cleaners and resealers formulated for natural stone. Gentle, non-abrasive and neutral pH formula won't etch or damage stone. Clean and reseal stone in one step applying a thin layer of sealer to build protection with every use. Contains StoneSpecific sealer in its formulation. Cuts through grease, dirt and oil while inhibiting the growth of mold and mildew.  
Available size: 1 QT

- 
**TILELAB® ONESTEP™ CLEANER & RESEALER**  
 Everyday professional cleaner, for stone, grout or tile, contains SurfaceGard to reseal as it cleans. Inhibits growth of mold and mildew.  
 Available size: 1 QT
- 
**TILELAB® HEAVY-DUTY CLEANER & STRIPPER**  
 Removes acrylic and wax floor finishes or light grout haze residue. Concentrated for tough cleaning, yet safe for grout, tile or stone.  
 Available sizes: 1 QT, 1 GAL




## TILELAB® GROUT & TILE CLEANER


Spray-and-wipe cleaner that cuts through grease, stains and soap scum without damaging grout or tile.  
Available sizes: 1 QT, 1 GAL

### STAR CLEAN®

Star Clean® is a sulfamic acid-based product with additives developed to safely clean cement grout residue from ceramic or quarry tile. Star Clean is also an excellent cleaner to remove efflorescence from masonry surfaces. When mixed with cold, potable water, it produces a nonvolatile, odorless, acidic solution that should not harm tile, grout joints or pigmented masonry surfaces.  
Available sizes: 2 LB, 6 LB

## PROBLEM SOLVERS

- 
**STONE SPECIFIC™ STAIN REMOVER**  
 Ready-to-use paste removes deep-set stains from stone, grout or porous tile with no scrubbing.  
 Available size: 1 LB
- 
**TILELAB® GROUT HAZE REMOVER**  
 Ready-to-use liquid removes grout haze or residue and efflorescence with a safe-to-use acidic treatment.  
 Available size: 1 QT
- 
**TILELAB® SULFAMIC ACID CLEANER**  
 Removes grout haze, grout residue, water deposits and efflorescence with a safe-to-use acidic treatment.  
 Available size: 1 TUB

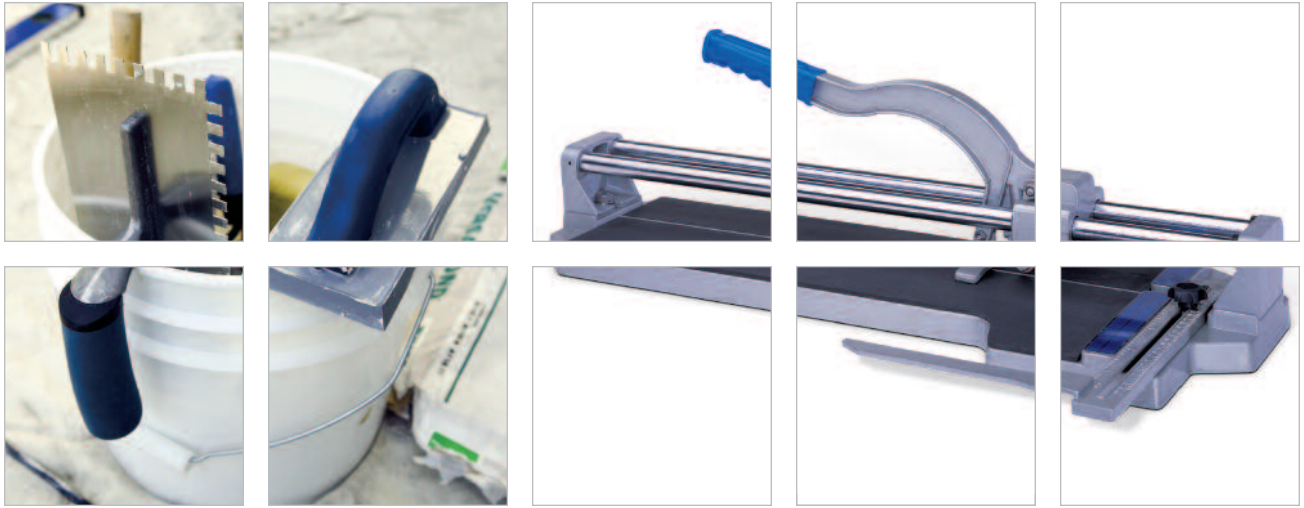

## SUPERIORBILT® TOOLS

THERE ARE NO TOOLS BETTER SUITED FOR WORKING WITH TILE AND STONE THAN SUPERIORBILT - A COMPLETE LINE OF HAND AND POWER TOOLS TO TACKLE VIRTUALLY ANY INSTALLATION.

### SUPERIORBILT® NOTCH TROWELS


Contractors spend too much time troweling to use anything but the best. And that's what Custom makes. We utilize stainless spring steel for rust-free durability and the SoftGrip™ handle for all day comfort and performance. And they're available in a variety of notch sizes to accommodate any application.

### SUPERIORBILT® GROUT FLOATS

Our floats are designed and built to make handling grout easy. They feature our SoftGrip™ handle for comfort and performance. The polypropylene rubber body is non-stick, won't scratch the tile surface and can hold an edge longer than other floats. They are available in a variety of styles and sizes to make the most of any tile or stone project.

### SUPERIORBILT® TILE CUTTERS

ProBiltSeries™ Two-Bar Tile Cutters are standard equipment for most experienced installers. They love the fact that our cutters have the largest scoring capacity in their class. Included with every cutter is a heavy-duty carrying case, extra titanium-coated carbide scoring wheel, and a protractor rip guide.



### ADDITIONAL PRODUCTS

- Tile Nippers
- Wall Shavers
- Knee Pads
- Mixers
- Hole Saws
- Scoring Knives
- Tile Spacers
- Sponges
- Scrapers
- Backerboard Screws/Tape
- Levels
- Gloves



# PLATINUM™ TOOLS

PLATINUM TOOLS WERE CREATED BY WATCHING AND LISTENING TO HOW TILE PROFESSIONALS USE THEIR TOOLS EVERYDAY. WE'RE HELPING TILE INSTALLERS GO BEYOND ORDINARY TOOLS. AND GO PLATINUM.

## PLATINUM TILE NIPPERS

Designed to work the way tile contractors use them and engineered to make the tough job of cutting tile easy and accurate, Platinum Tile Nippers have multiple pivot points to multiply hand strength when cutting tile. Special breaker feet create more leverage and pressure with less effort to make even tough porcelain tile break evenly and cleanly, producing more control and transferring less shock to the wrist. A built-in scoring wheel increases accuracy and efficiency to help avoid wasting large, expensive tile. These nippers even have a V-groove added to the jaws for pulling nails in baseboards.

## PLATINUM KNEE PADS

Tile installers spend hours working on their knees each day so they deserve Platinum Knee Pads with extraordinary fit, comfort and durability. Made of dense durable foam, they offer the ultimate in comfort with extra-wide, breathable straps constructed from thin, durable canvas to prevent bidding behind the knees. Designed with a left and a right, they match the knee cap contours and provide crucial support and protection. Square edges make them more stable, even when reaching laterally. The shin is supported with a lower wedge that take the pressure off knees and toes, extending work times and increasing comfort.

## PLATINUM NOTCH TROWEL

The Platinum Notch Trowel has a unique pyramid notched pattern to create a more predictable flow of mortar with fewer air pockets to get good coverage with less pressure - improving performance. Custom solved the problem of notches that wear down quickly and bend under pressure by using a thicker, higher grade of steel that reduces wear and lengthens the life of the trowel. The notch trowel has an exclusive wedge tail to lift tiles and check coverage while protecting the blade and notches. The ergonomic handle is comfortable in either hand when applying a burn coat of mortar with the flat side or combing with the notched side.



## PLATINUM GROUT FLOAT

This grout float has a new offset handle design to replace the traditional handle originally cut from a two-by-four. The grip is comfortable in either hand, even long enough to fit both, and eliminates the need for a second, offset float for hard-to-reach areas. The Platinum Grout Float is built of solid Polypropylene™ to last – it will never peel or delaminate. The combination of soft material with a sharp edge puts grout in the joints and doesn't leave it on the tile surface, making clean-up easy and fast.

## PLATINUM MIXER

The new Platinum Mixer features a handle that provides a balanced grip for both hands, offering stability and easy, steady control when mixing thin-set and grout. The mixer is designed specifically for the low-speed mixing needed to reduce the air blended in when mixing mortar, grout and self-leveling products. Its powerful 1100-watt motor has variable speed control and thermal overload protection, preventing it from overheating and cutting out under heavy load. It has separate mixing paddles, designed for grout and mortar and a rugged bag that holds the mixer and its two mixing paddles, plus has pockets for other tools.

# WARRANTIES

WARRANTY	MORTAR/ADHESIVE OPTIONS	SURFACE PREPARATION OPTIONS (IF REQUIRED)	GROUT OPTIONS
Lifetime	<ul style="list-style-type: none"> <li>■ MegaFlex</li> <li>■ MegaLite</li> </ul>		
15 Year	<ul style="list-style-type: none"> <li>■ Multi-Purpose Flex</li> <li>■ Premium Sanded mixed with CustomFlex Ultra Strength 2000 Additive</li> <li>■ Star-Epoxy Mortar</li> <li>■ OmniGrip</li> </ul>	<ul style="list-style-type: none"> <li>■ LevelLite</li> <li>■ WaterProof *</li> <li>■ Custom 9240</li> <li>■ EasyMat</li> <li>■ Crack Buster</li> <li>■ LevelQuik RS</li> <li>■ LevelQuik DP</li> <li>■ LevelQuik ES</li> </ul>	<ul style="list-style-type: none"> <li>■ MasterColor Grout</li> <li>■ Star Epoxy Grout</li> </ul>
10 Year	<ul style="list-style-type: none"> <li>■ ProLite</li> <li>■ Multi-Bond Flex</li> <li>■ Premium Sanded mixed with Star Set 1000</li> <li>■ Marble Master</li> <li>■ Fast Set 5000</li> </ul>		
5 Year	<ul style="list-style-type: none"> <li>■ Multi-Bond</li> <li>■ Medium Bed Mortar</li> <li>■ GTS Sanded mixed with Star Set 1000</li> </ul>	*Using these products increases duration of warranty by 5 years	
1 Year	<ul style="list-style-type: none"> <li>■ All other mortars or adhesives</li> </ul>		



JAMO Inc.  
8850 N.W. 79th Avenue  
Miami, FL 33166

800-826-6852  
www.jamoinc.com